

FIG. 1

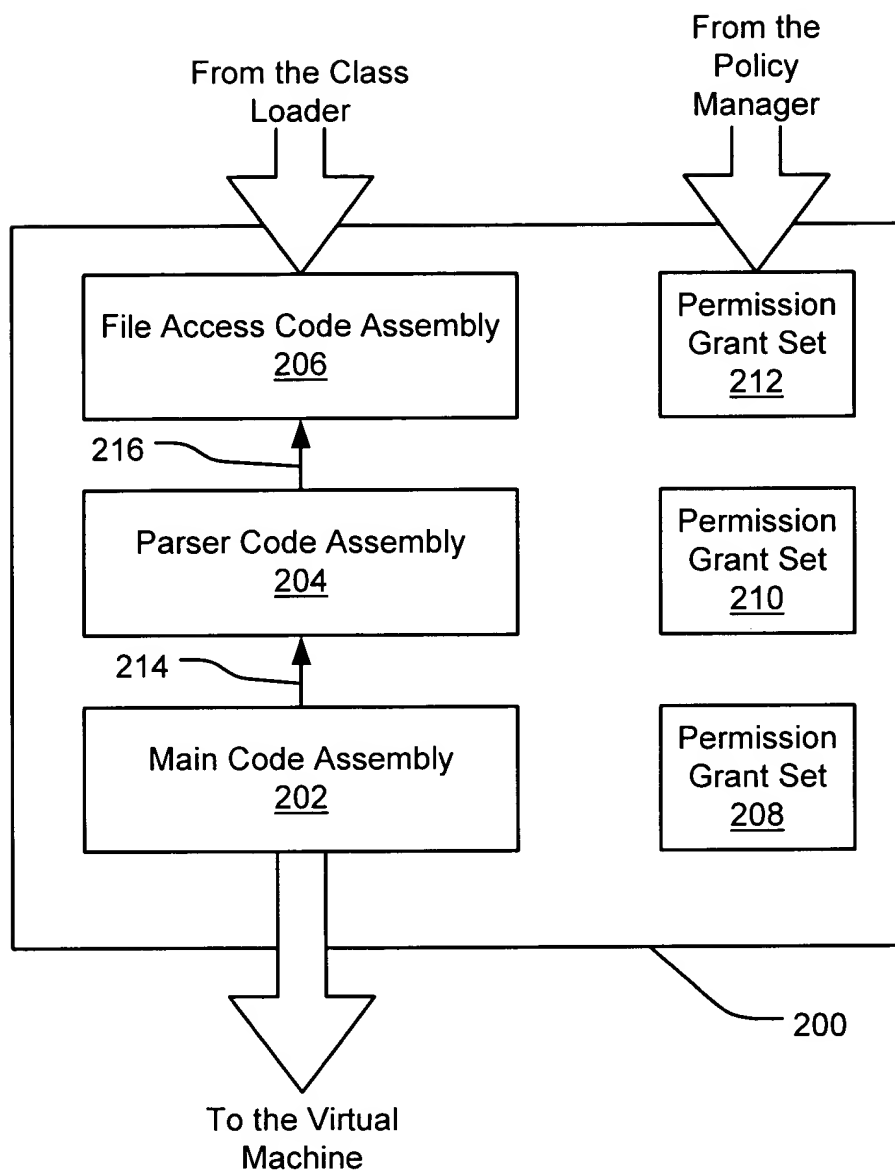


FIG. 2

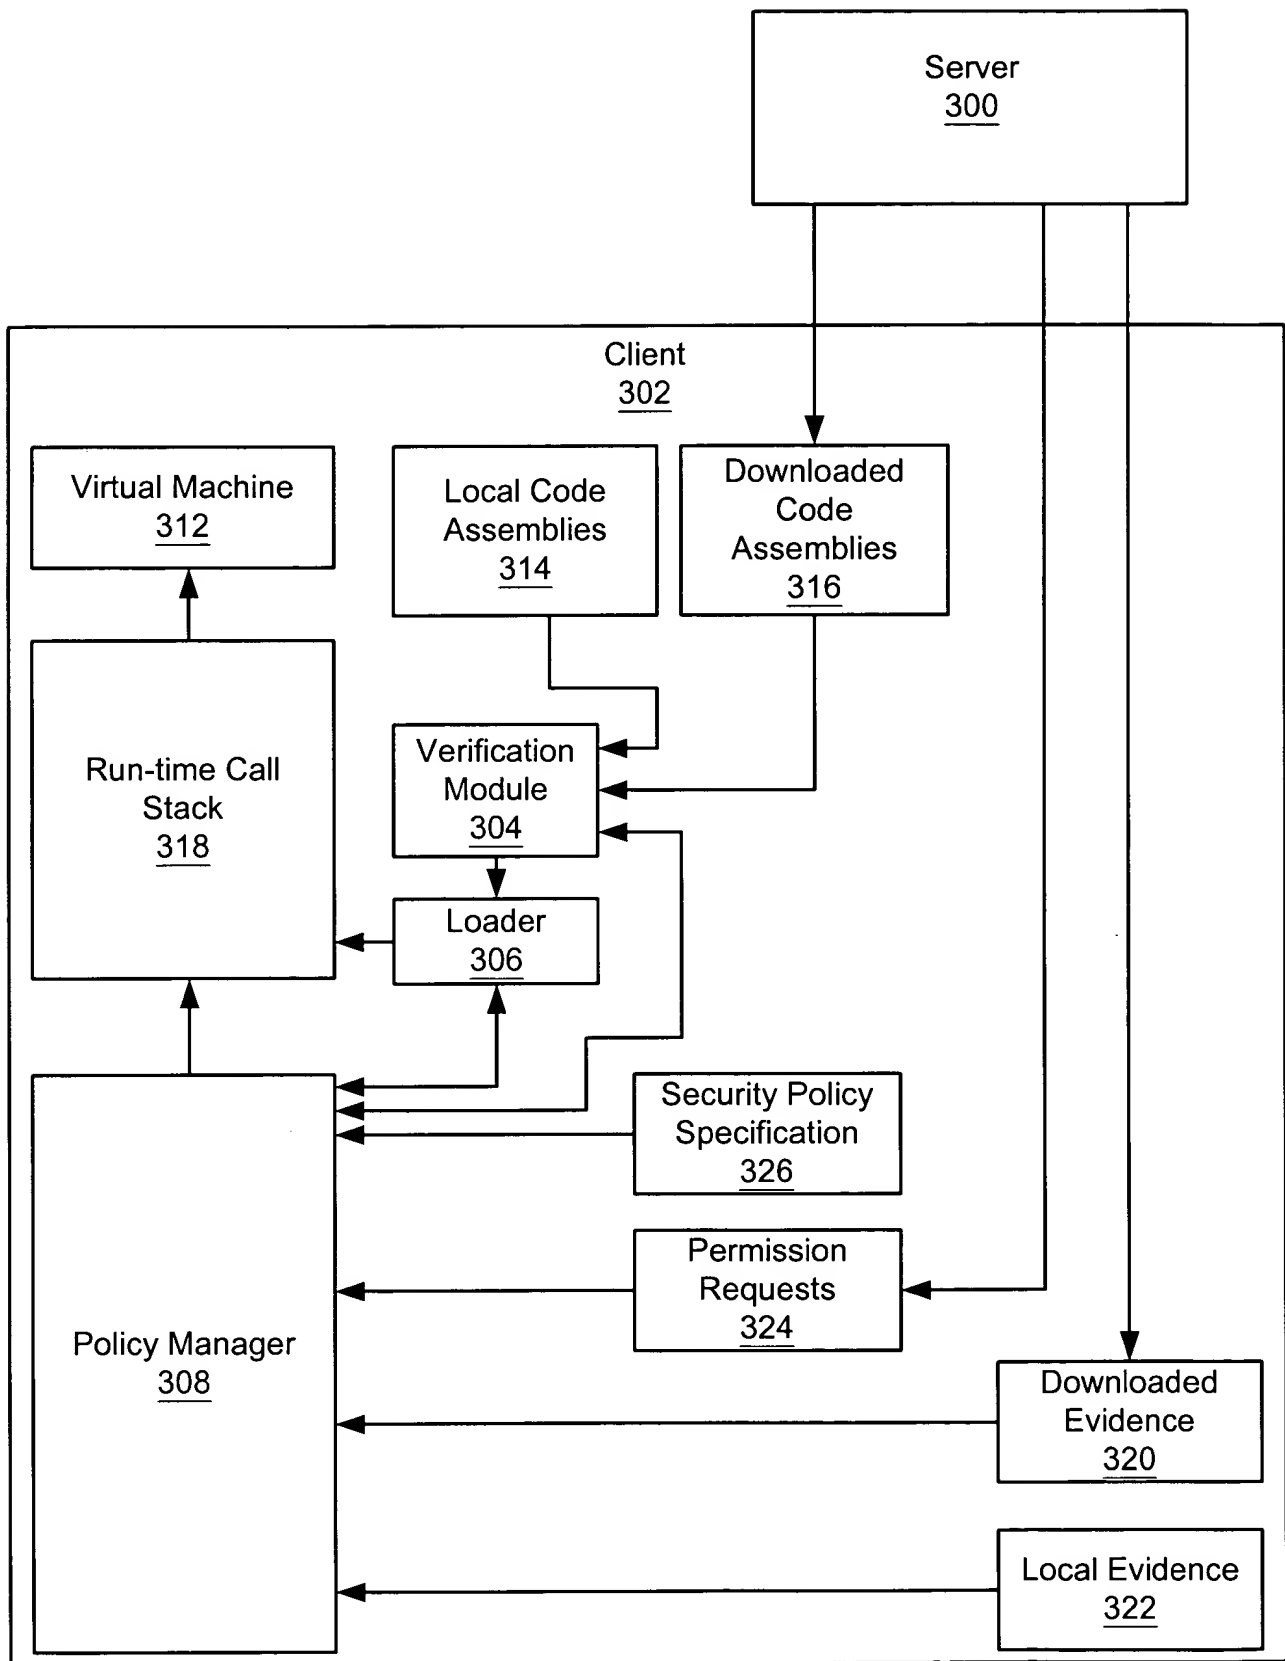


FIG. 3

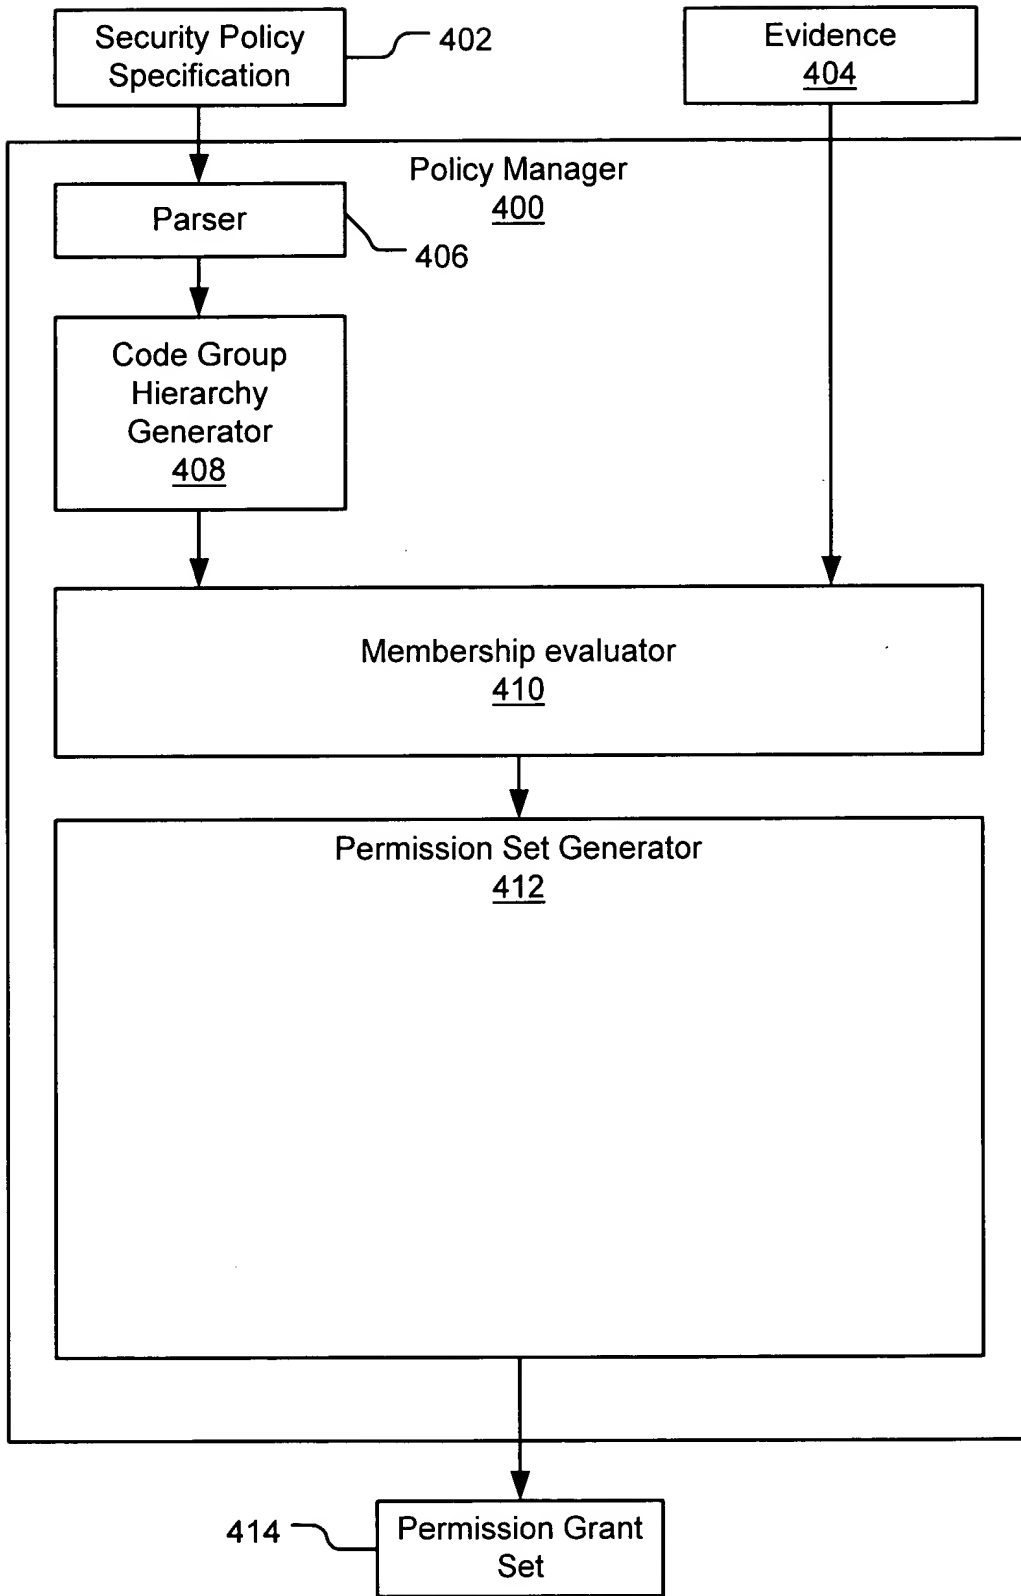


FIG. 4

```

graph TD
    SP[Security Policy Specification 500]
    E[Evidence 504]
    subgraph PM [Policy Manager 502]
        EL[Enterprise-level 506]
        ML[Machine-level 508]
        UL[User-level 510]
        ELP[Enterprise-level Permission Set 512]
        MLP[Machine-level Permission Set 514]
        ULP[User-level Permission Set 516]
        PSG[Permission Set Generator 518]
        EL --> ELP
        ML --> MLP
        UL --> ULP
        ELP --> PSG
        MLP --> PSG
        ULP --> PSG
    end
    SP -.-> EL
    SP -.-> ML
    SP -.-> UL
    E --> EL
    E --> ML
    E --> UL
    PSG --> PGS[Permission Grant Set 520]

```

FIG. 5

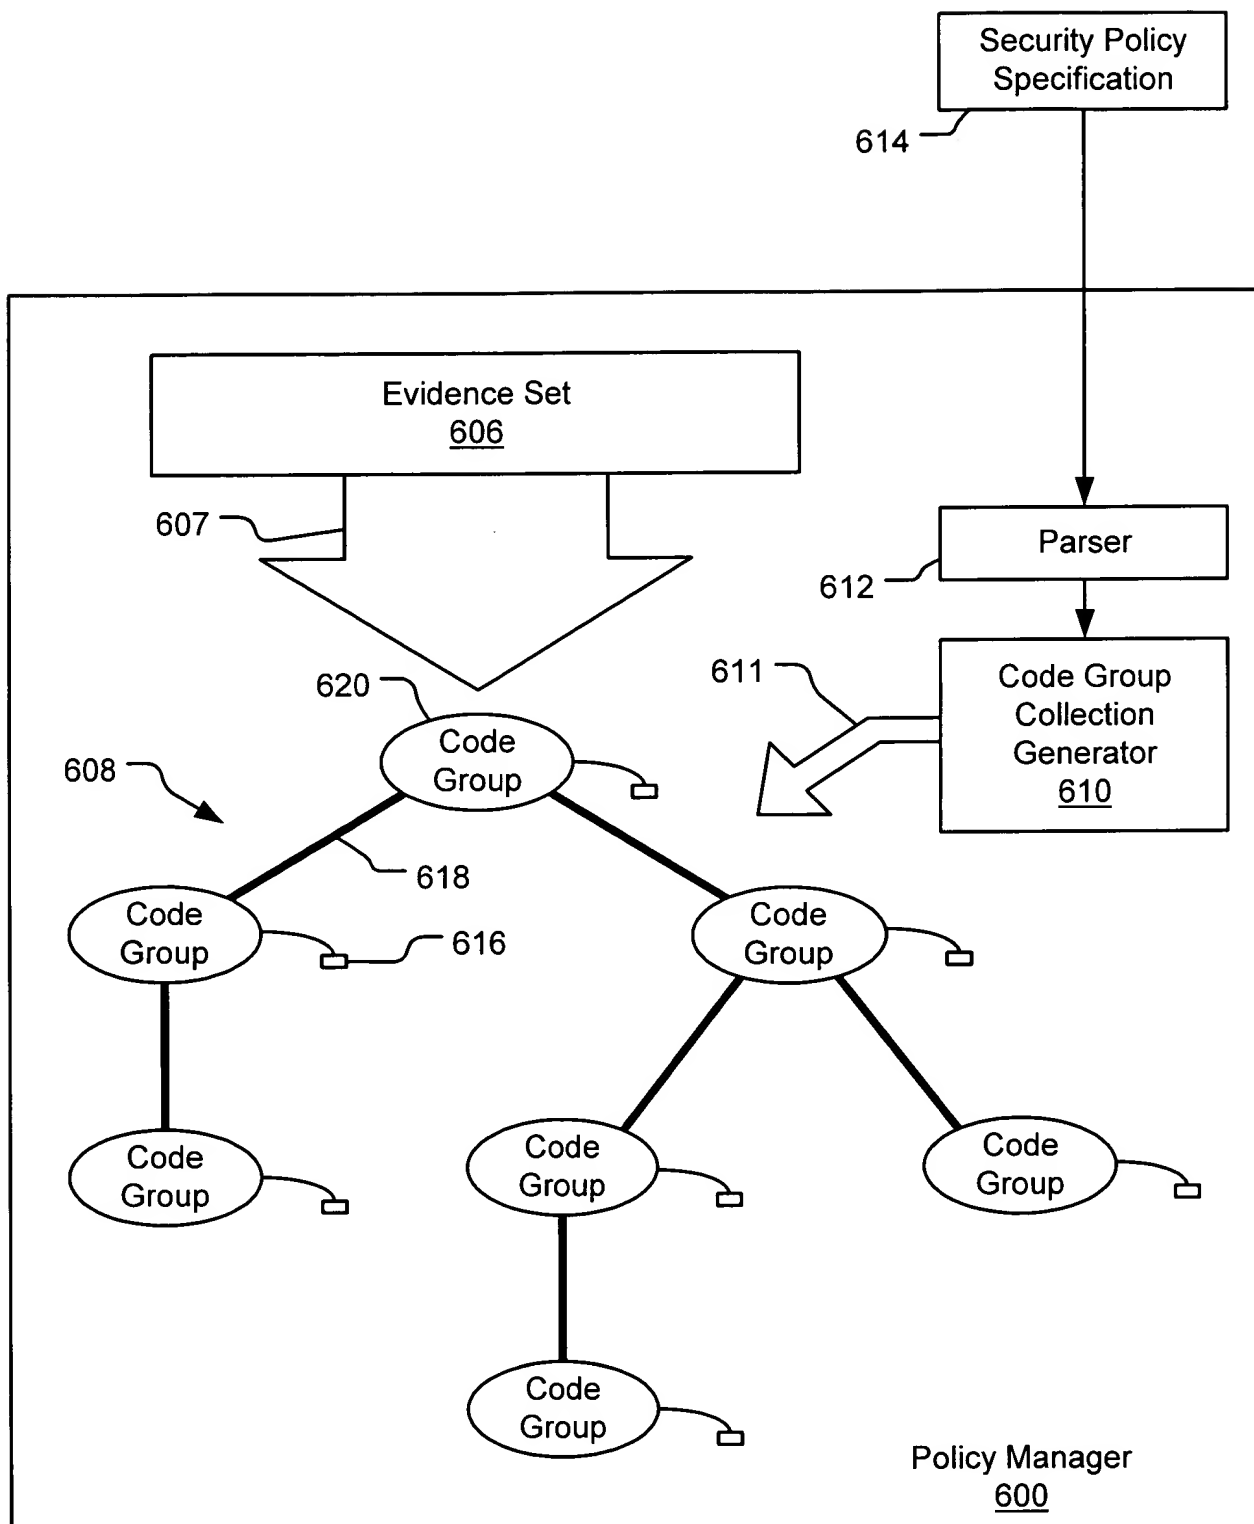


FIG. 6

The diagram illustrates a computer system, labeled "COMPUTER 700", enclosed in a rounded rectangular frame. Inside the frame, the following components are shown:

- OPTICAL DISK 719**: Represented by a CD-ROM icon.
- OPTICAL DISK DRIVE 718**: Connected to the optical disk.
- MAGNETIC DISK DRIVE 714**: Represented by a floppy disk icon.
- HARD DISK DRIVE 712**: Represented by a hard disk icon.
- REMOVABLE STORAGE 716**: Represented by a floppy disk icon.
- CPU 702**: Central processing unit.
- VIDEO ADAPTER 744**: Connected to the CPU.
- MONITOR 742**: Connected to the video adapter.
- NETWORK ADAPTER 752**: Connected to the CPU and the LAN.
- MEMORY 704**: A large block containing:
  - BIOS 712**, **ROM 708**, and **RAM 710** in the top row.
  - OPERATING SYSTEM 726** and **PROGRAM MODULE 730** in the middle row.
  - APPLICATION PROGRAMS 728** and **PROGRAM DATA 732** in the bottom row.
- INTERFACES**: **INTF 724** (for optical disk drive), **INTF 722** (for magnetic disk drive), and **INTF 720** (for hard disk drive) are connected to the CPU and the memory block.
- SERIAL PORT INTERFACE 740**: Connected to the CPU and the modem.
- KEYBOARD 734** and **Mouse 736**: Connected to the bottom of the computer frame.

External connections include:

- LAN 748**: A circular node connected to the network adapter and a **REMOTE COMPUTER 746**.
- WAN 750**: A circular node connected to a **MODEM 754**, which is in turn connected to the serial port interface.

The label "COMPUTER 700" is positioned at the top center of the frame. The label "706" is placed near the CPU and memory block.

FIG. 7

001230-188560

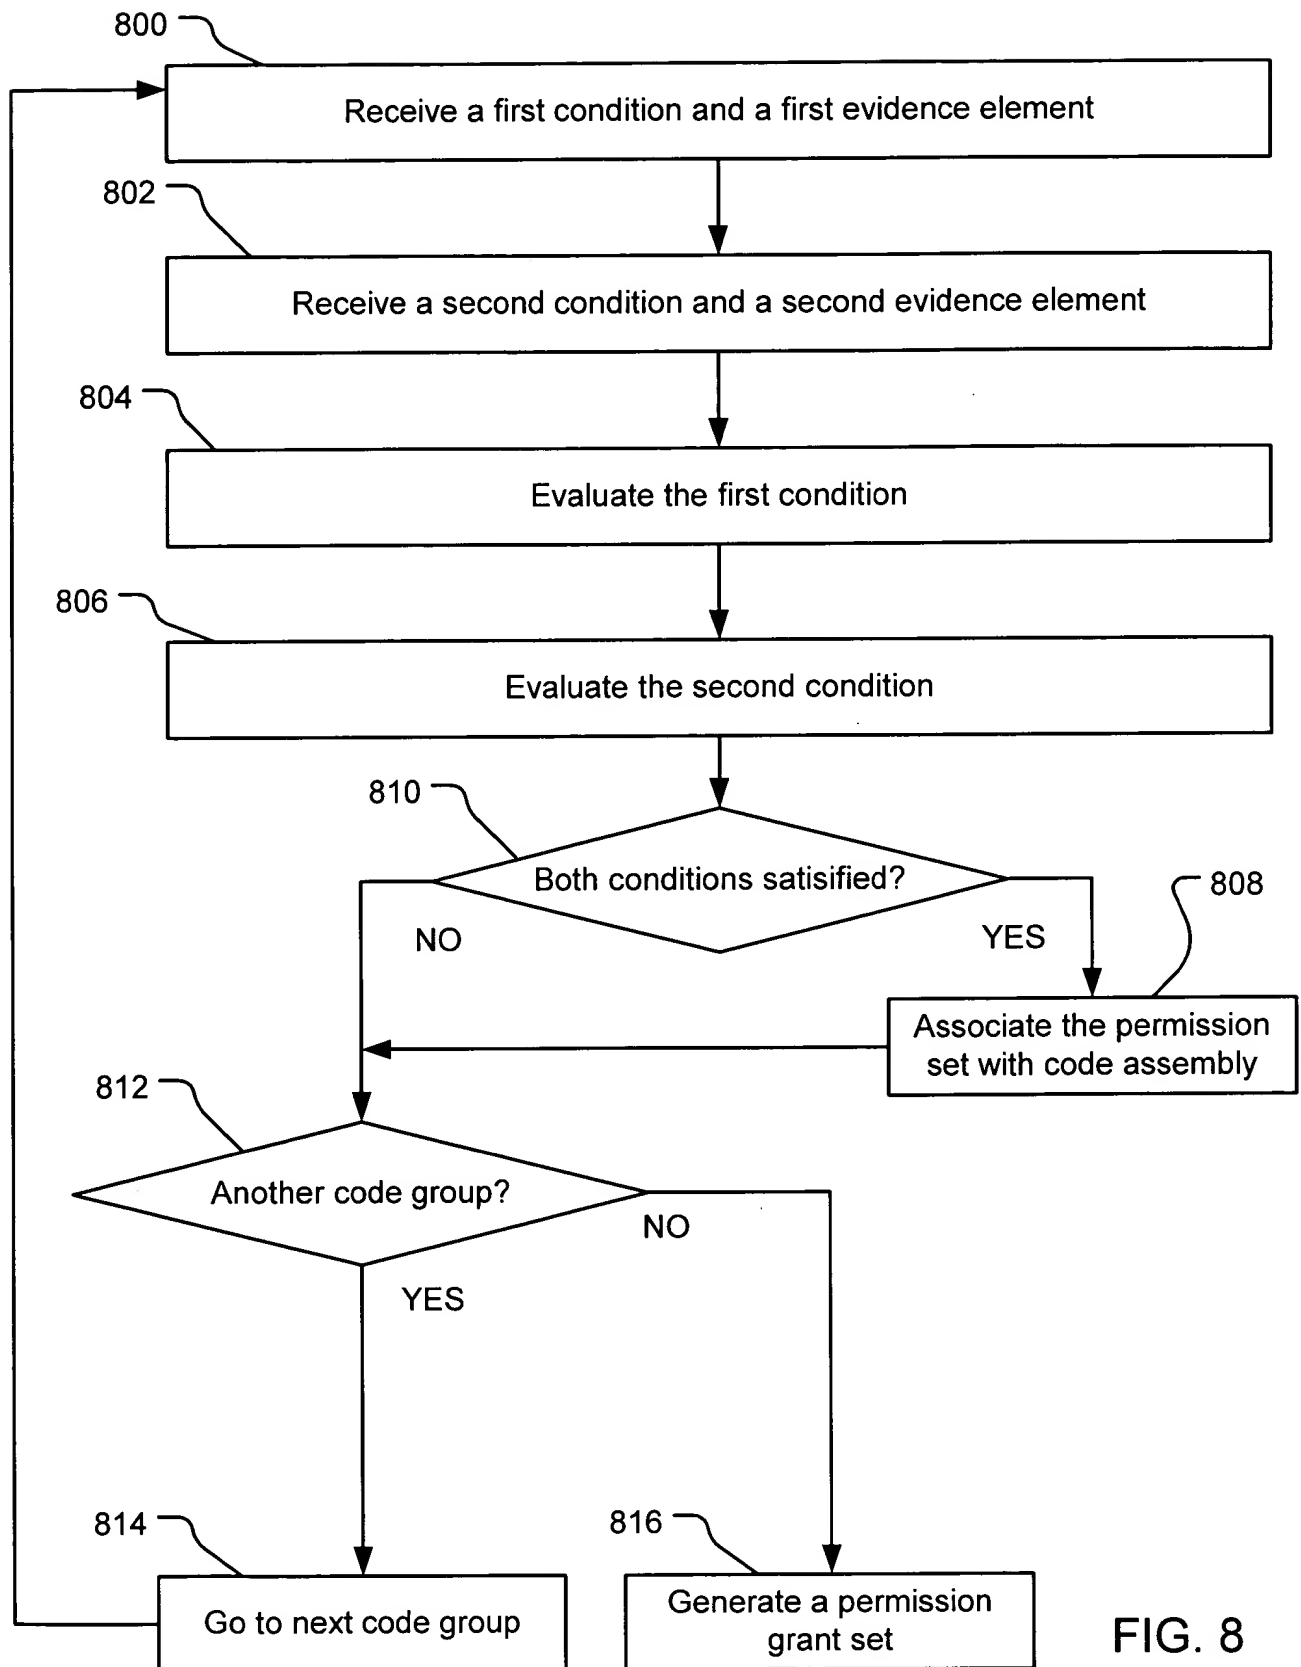


FIG. 8